


# newline *rs* +



Scalability

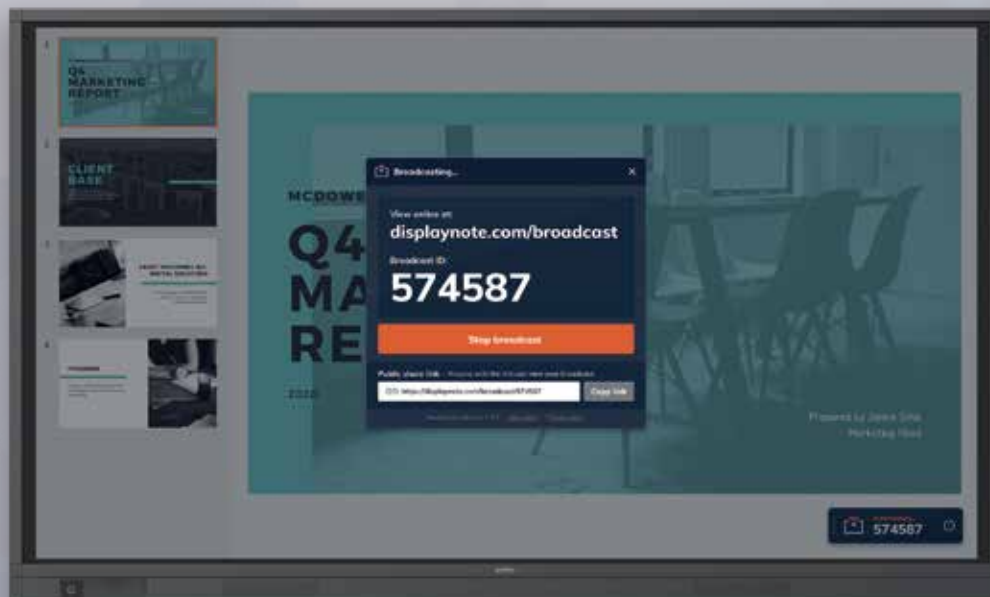

Diverse  
Connectivity



Intelligent Touch



Go Wireless



Win/iOS/Android  
Compatibility



Annotation



Personalized UI



Slim Frame  
Design

## THE HASSLE-FREE INTERACTIVE DISPLAY FOR CLASSROOMS

This series allows a collaborative experience that lets students interact using a stylus or their fingers. The responsive RS series display lets multiple students touch and draw on the display, lag-free and simultaneously. Designed for education, it features all the Newline interactive ecosystem tools needed to engage students and spark passion for learning.

Newline RS series features the following optional interactive ecosystem tools:

**CAST**

**BROADCAST**

**DISPLAY MANAGEMENT**

# newline *rs* +

Model	TT-6519RS	TT-7519RS	TT-8619RS
<b>Display</b>			
Backlight	LED		
Display Area	1432 × 807 mm	1652 × 930 mm	1893 × 1069 mm
Active Screen Size	65"	75"	86"
Display Ratio	16:9		
Resolution	3840 × 2160 Pixels		
Display Color Depth	8-bit	8-bit	10-bit
Brightness	≥ 370 nit		
Contrast Ratio	4000:1	4000:1	1200:1
Viewing Angle	178°		
Life Time	≥ 30,000 hours		
<b>Speaker</b>			
Speaker Position	Front		
Rated Impedance	8Ω		
Frequency Response	180 - 20K Hz		
Max. Power Output	15 W × 2		
<b>Electrical</b>			
Power Consumption	Maximum ≤ 250 W Standby Mode ≤ 0.5 W	Maximum ≤ 400 W Standby Mode ≤ 0.5 W	Maximum ≤ 450 W Standby Mode ≤ 0.5 W
Working Voltage	AC 100-240 V, 50/60 Hz		
<b>Touch</b>			
Touch Surface	Tempered Anti-Glare Glass		
Transparency	> 88%		
Surface Hardness	7H		
Touch Technology	Infrared Touch		
Touch Points	20 Points in Windows/ 10 Points in Android		
Writing Tools	Passive Pen/ Finger/ Palm		
Positioning Accuracy	±2 mm		
Communication Interface	USB		
<b>Transportation/ Storage</b>			
Storage Temperature/ Humidity	-15°C - 55°C/ 20 - 90% RH		
Working Temperature/ Humidity	0°C - 40°C/ 20 - 80% RH		
Mounting (Optional)	Wall Mount/ Floor Stand		
Outline Dimensions	1546 × 944 × 96 mm	1770 × 1071 × 109 mm	2019 × 1212 × 109 mm
Packing Dimensions	1670 × 1056 × 221 mm	1894 × 1193 × 247 mm	2170 × 1345 × 275 mm
Net Weight	44 kg	56 kg	72 kg
Gross Weight	57 ± 2 kg	71 ± 2 kg	90 ± 2 kg
Vesa Mount Installation Position	600 × 400 mm	800 × 400 mm	800 × 400 mm
<b>Ports</b>			
Front Interface Inputs	HDMI 1.4 × 1, USB(Touch) × 1, USB(Dynamic) × 2, MIC In × 1		
AV Inputs	HDMI 2.0(4K@60Hz) × 2, DP 1.2(4K@60Hz) × 1, VGA(1920×1080@60Hz) × 1, PC Audio × 1, USB(Touch) × 4		
AV Outputs	HDMI Out (Support 4k@60Hz) × 1		
Other	USB2.0(Dynamic) × 1, USB3.0(Dynamic) × 1, USB 2.0 Embedded × 1, RS232 × 1, RJ45 × 2, OPS Slots(4K@60Hz) × 1, DC 5V-2A Out, Line Out × 1, SPDIF Out × 1		
<b>Other</b>			
Android Version	8.0		
Intelligent Thermo-Protector	Yes		
OPS PC	Available		
Wi-Fi Dongle	Available		
Newline Cast (Screen Sharing)	Available		

## newline

**HEADQUARTERS (TX, USA)**  
101 East Park Blvd.  
Suite 807 Plano,  
TX 75074, USA  
TEL: +1 888 233 0868  
info@newline-interactive.com

**ASIA PACIFIC OFFICE (Taipei, Taiwan)**  
17F, No. 653, Bannan Rd,  
Zhonghe Dist, New Taipei City  
235, Taiwan  
TEL: +886 2 8228 2089  
info\_ap@newline-interactive.com

**EUROPE OFFICE (Madrid, Spain)**  
Ronda de Poniente, N°2, 1st floor,  
Oficina 1B, 28760,  
Tres Cantos, Madrid, Spain  
TEL: +34 911 169178  
info\_eu@newline-interactive.com

**INDIA OFFICE (Chennai)**  
Room No. 203, No. 37, TTK Road,  
Alwarpet, Chennai,  
Tamil Nadu, India, 600018  
TEL: 1 800 419 0309  
info.in@newline-interactive.com

**KOREA OFFICE (Seoul, South Korea)**  
A816, 8F, 401 Yangcheon-ro,  
Gangseo-gu, Seoul,  
07528 Korea  
TEL: +82 2 2638 5140  
koreainfo@newline-interactive.com

newline-interactive.com

2019 Newline Interactive Inc. Specification may vary by region, please contact our local offices for details. Actual product features and specifications are subject to change without notice. This material may include corporate names and trademarks of third parties which are the properties of the third parties respectively.