

Specifications

SMART Board® 7086R interactive display with iQ

Model SBID-7286R

Overview

The SMART Board® 7086R interactive display with iQ and SMART Learning Suite helps you engage students and achieve better outcomes.

The 4K ultra-high-definition LED display provides optimal image clarity and wide viewing angles. The display's HyPr Touch™ with EMR technology provides industry-leading touch and digital ink performance. You can interact with applications through touch, write or draw over any application with the four pens, and erase with your palm or the two erasers—all without switching tools or modes. With the new True Palm Rejection feature, you can even rest your palm on the screen while writing or drawing. The Pen ID™ feature allows you to assign different appearances to the pens, and multiple users can write or draw at the same time.


The display's embedded iQ experience connects devices, lesson content, and collaborative software to create a premium instructional experience. This PC- and appliance-free computing technology provides one-touch access to collaborative tools, such as wireless screen sharing and a web browser, and a diverse suite of SMART applications—Notebook lessons, workspaces, and whiteboard. With minimal network integration, there's no need for wires, cables, or manual software and firmware updates.

See smarttech.com for more information.



Dimensions and weights¹

Dimensions

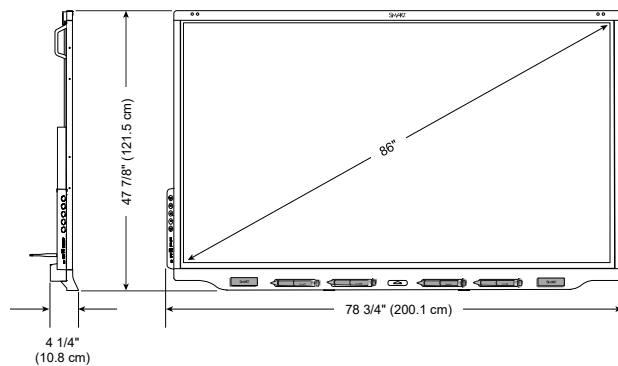

Weight

168 lb. (76 kg)

Shipping dimensions (including pallet)²

85" × 54 1/2" × 11"
(216.2 cm × 138.6 cm × 28 cm)

Shipping weight

214 lb. (97 kg)



As an ENERGY STAR® certified signage display, the SMART Board 7086R interactive display meets strict energy efficiency guidelines set by the U.S. Environmental Protection Agency and Department of Energy.

¹All dimensions ± 1/8" (0.3 cm). All weights ± 2 lb. (0.9 kg).

²Product ships upright.

Highlights

HyPr Touch with EMR	Electromagnetic resonance (EMR) technology provides industry-leading performance with absolutely zero contact detect height and support for over 1,000 levels of pressure by the pens, resulting in an intuitive, pen-on-paper feel
True Palm Rejection	Palms, wrists, hands, and other objects are ignored while users write or draw so that they can focus on collaboration instead of how they hold the pens
USB Type-C input	Support for modern devices, with a single connection for touch, video, and audio
Ambient light sensor	Screen automatically dims or brightens, ensuring comfort when viewing content in any lighting condition

Hardware

Interaction

Touch technology	HyPr Touch with EMR
Multitouch capabilities	Up to 20 finger touch points, four pen touch points and two eraser touch points ³
Object Awareness™	Behavior adjusts automatically to the tool or object you're using, whether it's a pen, finger, eraser, or palm
Simultaneous Tool Differentiation	Multiple users can touch the display and use pens and erasers at the same time for a natural, fully collaborative experience
Pen ID	Four people can write independently and simultaneously, using different colored ink
Silktouch™	Ultra-smooth finish that allows you to use the display for hours without finger burn
True Palm Rejection	Palms, wrists, hands, and other objects are ignored while users write or draw
Pressure sensitivity	Detection of over 1,000 levels of pressure by the pens

Display

Type	LCD with LED back light
Aspect ratio	16:9
Optimal resolution (HDMI inputs)	4K UHD (3840 × 2160) at 60 Hz
Horizontal frequency (typical)	135 kHz
Vertical frequency (typical)	60 Hz
Brightness (maximum)	350 cd/m ²

³Chrome OS™ is limited to 10 simultaneous touches, including gestures. Automatic pen recognition, plus palm, pen, and eraser differentiation are available in supported applications.

Pixel dimensions	0.4935 mm × 0.4935 mm
Viewing angle	178°
Response time (typical)	8 ms
1000BASE-T Ethernet	Two external ports for a Gigabit Ethernet switched network connecting the interactive display and the OPS module to an external network and an external device, such as a computer
Wi-Fi	IEEE 802.11A/B/G/N/AC with 2 × 2 MIMO (both 2.4 and 5 GHz bands)
Bluetooth®	Bluetooth 4.2 dual mode (backwards compatible with Bluetooth 2.1 + EDR)
Sensors	2 Proximity 1 Ambient light 1 IR (for remote control)
Audio	Two 15 W integrated speakers
Noise level	<38 dBA
Included cables and accessories	1 Country-specific power cable 1 USB 2.0 cable 4 Pens 2 Erasers 1 Remote control 1 WM-SBID-200 wall mount
Mounting holes	For a standard VESA 800 mm × 600 mm mounting plate Lower mounting holes 12 1/8" (30.7 cm) from the bottom of the interactive display
Mounting bracket depth	Minimum depth of 2" (5.1 cm) for all components on the back of the interactive display for airflow
iQ experience	
iQ experience	iQ experience embedded in the display provides better performance without the need to install a separate appliance
Included apps and features	Customizable Home screen Whiteboard SMART Notebook Player Browser Screen Share File and app libraries Writing and drawing over any input Freeze screen and screen shade Automatic software updates

Supported languages

- Chinese (simplified)
- Chinese (traditional)
- Danish
- Dutch
- English
- Finnish
- French
- German
- Italian
- Korean
- Norwegian
- Portuguese
- Russian
- Spanish
- Swedish
- Ukrainian
- Vietnamese

Software

Included software

- iQ Android-based embedded computing
- SMART Ink and SMART Product Drivers
- SMART Notebook basic version
- Bonus one-year subscription to SMART Learning Suite (including SMART Notebook software)
- Subscription to SMART Remote Management for the length of warranty

Connectors



Convenience panel

- 2 USB 3.0 Type-A (for media)
- 1 USB 3.0 Type-B (for touch)
- 1 USB Type-C
- 1 HDMI® 2.0 in with HDCP 1.4 and HDCP 2.2 support

Connector panel	1	Accessory slot (for OPS devices, such as the optional SMART PCM8 OPS PC)
	3	USB 3.0 Type-A (for media)
	1	USB 2.0 Type-A (for service use only)
	2	USB 3.0 Type-B (for touch)
	3	HDMI 2.0 in with HDCP 1.4 and HDCP 2.2 support
	1	HDMI 2.0 out
	1	VGA in
	1	Stereo 3.5 mm in
	1	Stereo 3.5 mm out
	1	S/PDIF out
	2	RJ45
	1	RS-232 in
	1	RS-232 out
	Back of display	1
1		AC power out

Installation requirements

Interactive display See the *SMART Board 7000R and 7000R Pro series interactive displays installation and maintenance guide* (smarttech.com/kb/171538)

! IMPORTANT

The display needs an internet connection for downloading and installing important updates. Ask the network administrator to configure the network correctly for the iQ experience. For more information about network configuration, see [Connecting a SMART display with the iQ experience to a network](#).

Room computers and guest laptops

General requirements	See SMART Notebook software release notes
4K UHD	Video card that can support 3840 × 2160 resolution at 60 Hz See Minimum requirements for Ultra High Definition or 4K on your interactive flat panel

Mini-computers

General requirements	See SMART Notebook software release notes
Dimensions	Smaller than 10" × 10" × 2" (25.4 cm × 25.4 cm × 5.1 cm)
Weight	Less than 10 lb. (4.5 kg)
Mounting	VESA 75 mm × 75 mm or 100 mm × 100 mm mounting pattern

Cable requirements

HDMI	<p>Maximum length: 23' (7 m)</p> <hr/> <p>NOTES</p> <ul style="list-style-type: none"> • Use only certified HDMI cables that have been tested to support the performance standard you require. • The performance of cables longer than 23' (7 m) is highly dependent on the cable's quality. <hr/>
USB 2.0	<p>USB 2.0 certified Hi-Speed (480 Mbps) support Maximum length: 16' (5 m)</p> <hr/>
USB 3.0	<p>USB 3.0 certified SuperSpeed (5 Gbps) support Maximum length: 9' (3 m)</p> <hr/> <p>NOTES</p> <ul style="list-style-type: none"> • SMART supports only installations that use directly connected video and USB cables, AC-powered extenders, or USB extenders purchased from SMART. • You might be able to use higher-grade cables that are longer than specified. If you have problems with such a cable or an extender of any type, test the connection with a shorter cable before contacting SMART Support. <hr/>
USB Type-C	<p>USB 3.1 certified SuperSpeed (5 Gbps) support Maximum length: 6' (2 m)</p> <hr/> <p>NOTES</p> <ul style="list-style-type: none"> • To use a USB Type-C cable for video, you need: <ul style="list-style-type: none"> ◦ A cable that supports USB 3.1 (Gen 1 or Gen 2) ◦ A computer that supports Display Port Alternate Mode • Passive USB Type-C cables are sufficient for 60 W charging. • You might be able to use higher-grade cables that are longer than specified. If you have problems with such a cable or an extender of any type, test the connection with a shorter cable before contacting SMART Support. <hr/>
Important	<p>Using cables that exceed these maximum lengths can produce unexpected results, such as degraded picture quality or USB connectivity. Refer to <i>Installation best practices for SMART products</i> (smarttech.com/kb/171035) for comprehensive information about cables and extensions for SMART hardware products.</p>

Storage and operating requirements

Power requirements	100V to 240V AC, 50 Hz to 60 Hz
Power consumption at 77°F (25°C)	
Standby mode	<0.5 W

SMART Board 7086R interactive display with iQ – Model SBID-7286R

Normal operating	169 W
Operating temperature	41–95°F (5–35°C)
Storage temperature	-4–140°F (-20–60°C)
Humidity	5–80% relative humidity, non-condensing

Regulatory certifications (Model ID: IDR786-1)

U.S. / Canada	UL, FCC, IC, CONEG Packaging, Proposition 65, Conflict Minerals, ENERGY STAR
EU / EEA / EFTA	CE, RoHS, REACH, Battery, Packaging, POPs, WEEE
Australia / New Zealand	RCM

Purchasing information

Order number	
SBID-7286R	SMART Board 7086R interactive display with iQ and SMART Learning Suite
Optional accessories	See smarttech.com/accessories

Warranty information

SMART Assure warranty Includes advanced hardware replacement and access to onsite support. Terms and conditions vary by region. Contact your local reseller or distributor for information and visit [smarttech.com/warranty](https://www.smarttech.com/warranty).

[smarttech.com/support](https://www.smarttech.com/support)
[smarttech.com/contactsupport](https://www.smarttech.com/contactsupport)

© 2020 SMART Technologies ULC. All rights reserved. SMART Board, SMART Notebook, Pen ID, HyPr Touch, Object Awareness, Silktouch, smarttech, the SMART logo and all SMART taglines are trademarks or registered trademarks of SMART Technologies ULC in the U.S. and/or other countries. The Bluetooth word mark is owned by the Bluetooth SIG, Inc. and any use of such marks by SMART Technologies ULC is under license. The Adopted Trademarks HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries. All other third-party product and company names may be trademarks of their respective owners. This product and/or use thereof is covered by one or more of the following U.S. patents: www.smarttech.com/patents. Contents are subject to change without notice. March 4, 2020.